

AIRNEXUS VRV32 CONTROLLER WIRING SCHEMATIC


KEY SPECIFICATIONS

Air Conditioner Brand	Daikin
Configuration	Standalone (1:1) systems ONLY
Max. Connected Units	32 indoor or outdoor


IMPORTANT TO NOTE

F1+F2 is located on the INDOOR FAN COIL UNIT on Daikin standalone (1:1) systems.


All bus cable must be 2-core shielded cable,
recommended 0.75mm².
Maximum number of units that can be connected
to Airnexus VRV32 controller is 32 units.

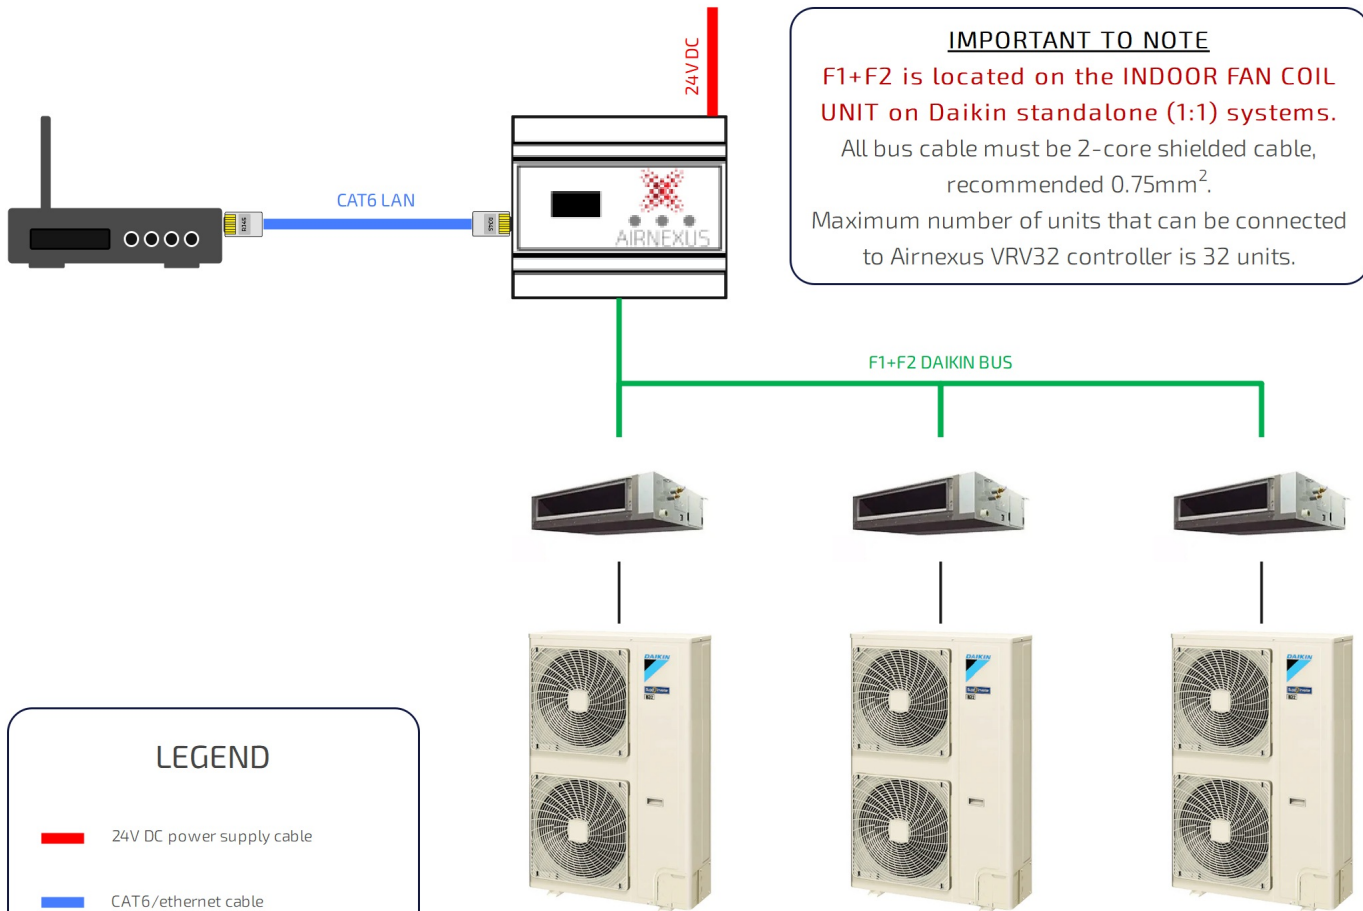


LEGEND


 24V DC power supply cable

 CAT6/ethernet cable

 2-core shielded bus cable

 Network router

 Airnexus VRV32 Controller

 Daikin 1:1 Outdoor Condenser

 Daikin 1:1 Indoor Unit

**** Daikin smaller domestic ranges may need an additional Daikin adapter to provide the F1+F2 connections. Please check the manufacturer's specifications for each unit type to ensure correct connections are available. ****

Unit configuration used above is for illustration purposes